

One Series Transmitter-Switch for Division 1 (Zone 1)

- Electronic pressure and temperature transmitter-switches with no moving parts
- 4-20 mA output and digital process display
- Fully adjustable deadband and smart self diagnostics
- Digital display and tamper-proof keypad adjustment of setpoint and deadband
- Explosion-proof enclosure for Division 1 (Zone 1) hazardous areas
- 2-wire, 4-wire and loop powered models available



TX200 Series HART® & ASIC Pressure Transmitter

- Smart TX200H offers HART 7 communication and 4-20 mA output
- TX200H 10:1 range turndown helps reduce inventory
- ASIC based TX200 offers 4-20 mA output or 1-5 VDC or 0-10 VDC output
- Rugged 316 stainless steel construction, welded and hermetically sealed
- Wide variety of process connections available for pressure ranges from 0 to 15 psi Up to 0 to 25,000 psi



120 Series – Electro-Mechanical Pressure and Temperature Switch

- Explosion-proof line of pressure, differential pressure, and temperature models with wide selection of ranges, sensors and pressure connections
- UL, cUL, ATEX certified for hazardous locations
- Single or dual switch outputs
- Welded stainless steel diaphragm pressure sensor
- Internal or external set point adjustment



QUICK START INSTRUCTIONS

- Press (both) the left and right buttons \leftrightarrow simultaneously.
- Press the right button \rightarrow and enter the 4-digit passcode (default = 0000).
- Press the right button once \rightarrow and then the left button twice $\leftrightarrow\leftrightarrow$ until SW1 appears on the display.
- Press the right button \rightarrow and make the desired changes to the switch mode, set point and deadband. Changes are made using the left button \leftrightarrow
- Press both the right and the left button \leftrightarrow simultaneously to discard or save changes
 - To discard changes, press both the left and the right buttons \leftrightarrow simultaneously.
 - To save changes, press the left button \leftrightarrow and then press both the left and the right buttons \leftrightarrow simultaneously

180 Dexter Ave., P.O. Box 9143
Watertown, MA 02471-9143
Phone: 617.926.1000
Fax: 617.926.2568

www.ueonline.com

QS card-04

Q

uick Start


P

rogramming

G

uide



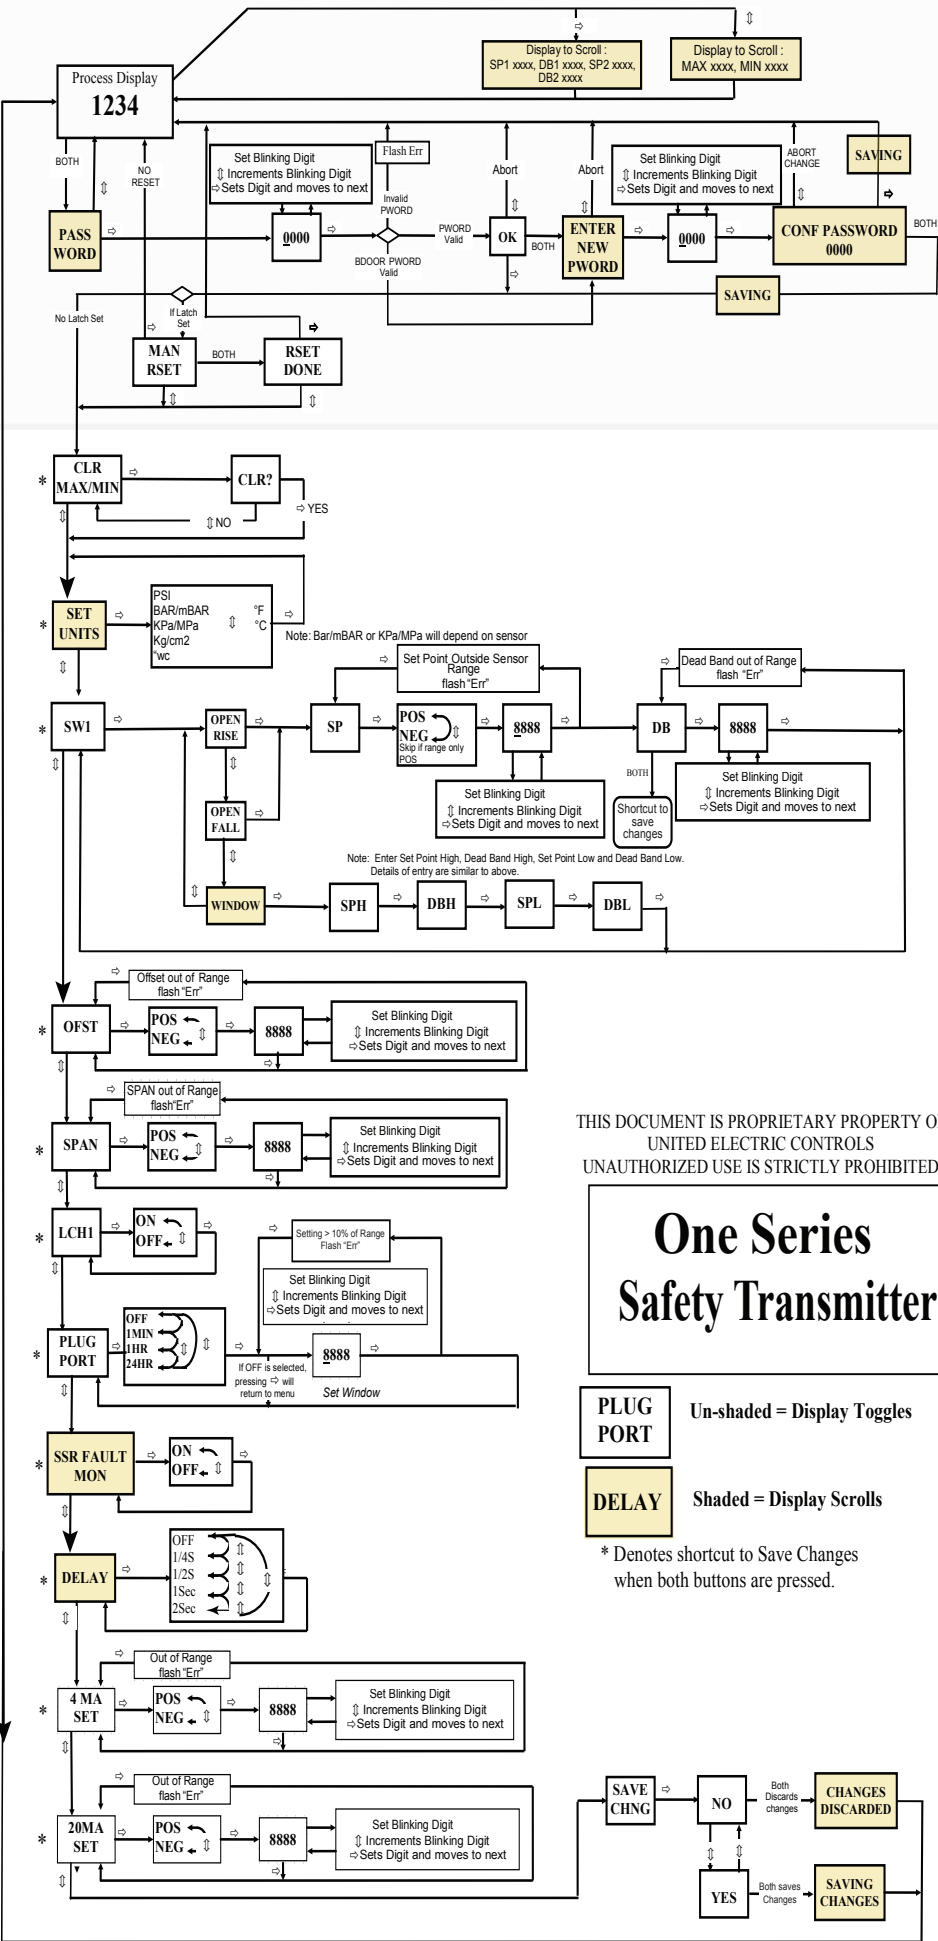

THIS DOCUMENT IS PROPRIETARY PROPERTY OF
UNITED ELECTRIC CONTROLS
UNAUTHORIZED USE IS STRICTLY PROHIBITED

One Series Safety Transmitter

**PLUG
PORT**

Un-shaded = Display Toggles

DELAY

Shaded = Display Scrolls

* Denotes shortcut to Save Changes
when both buttons are pressed.